

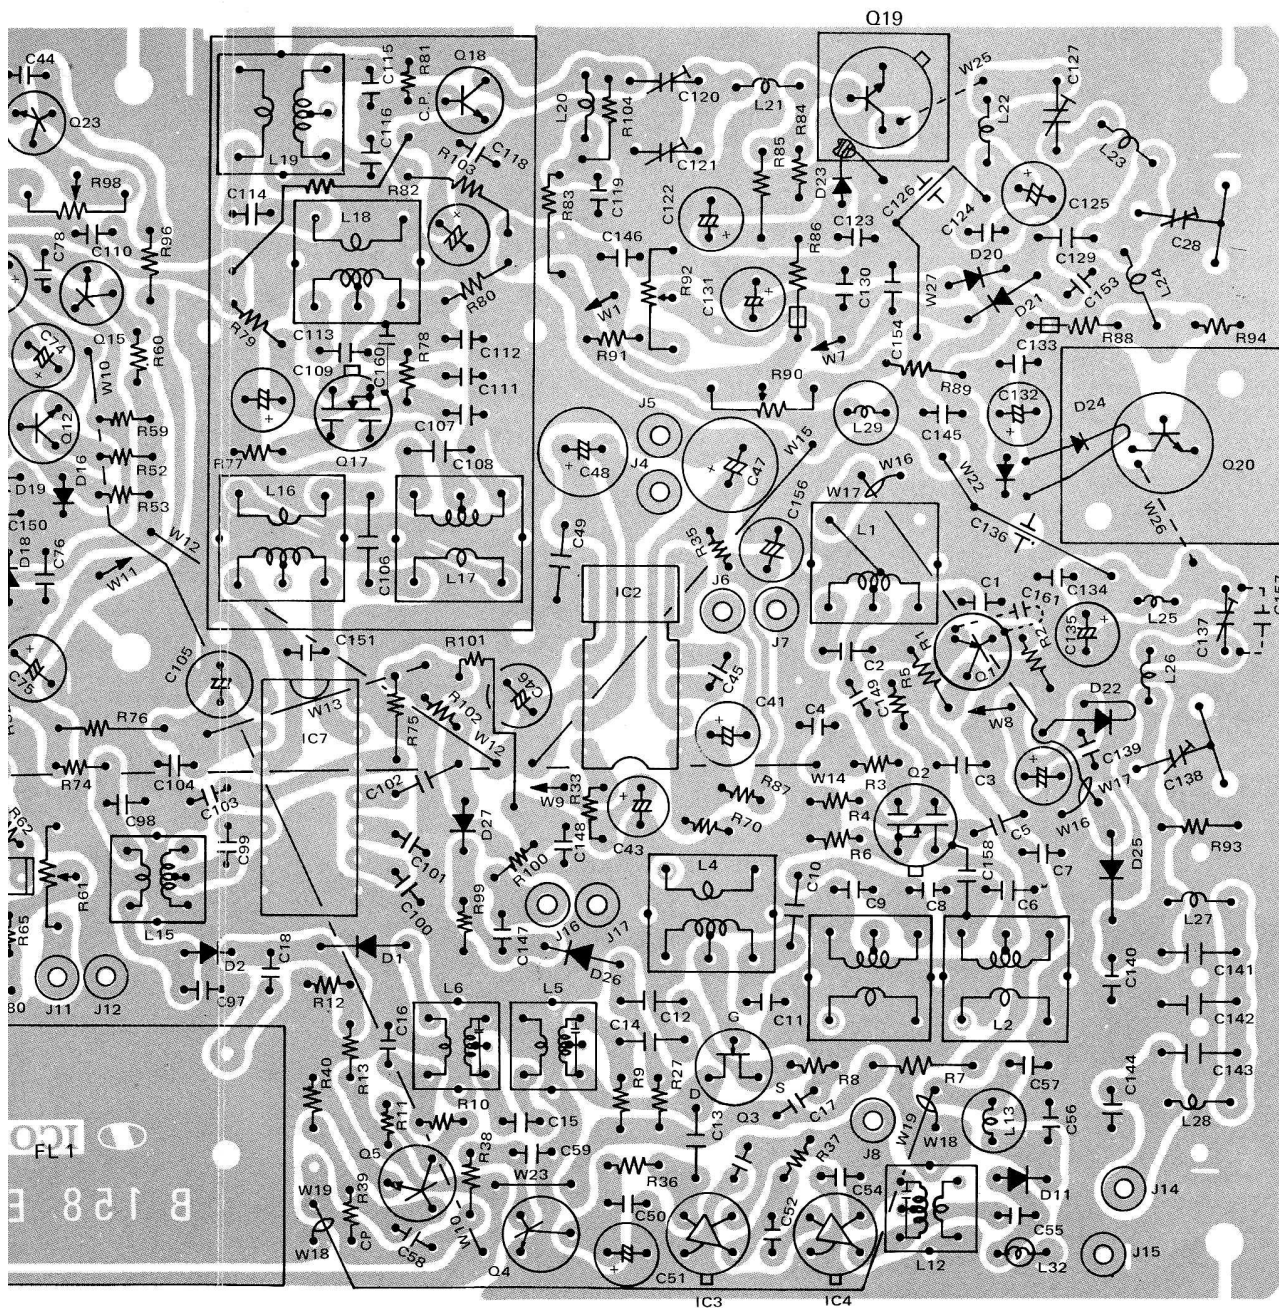



4, 5, 8, 9, 10,
11, 13, 22, 23,

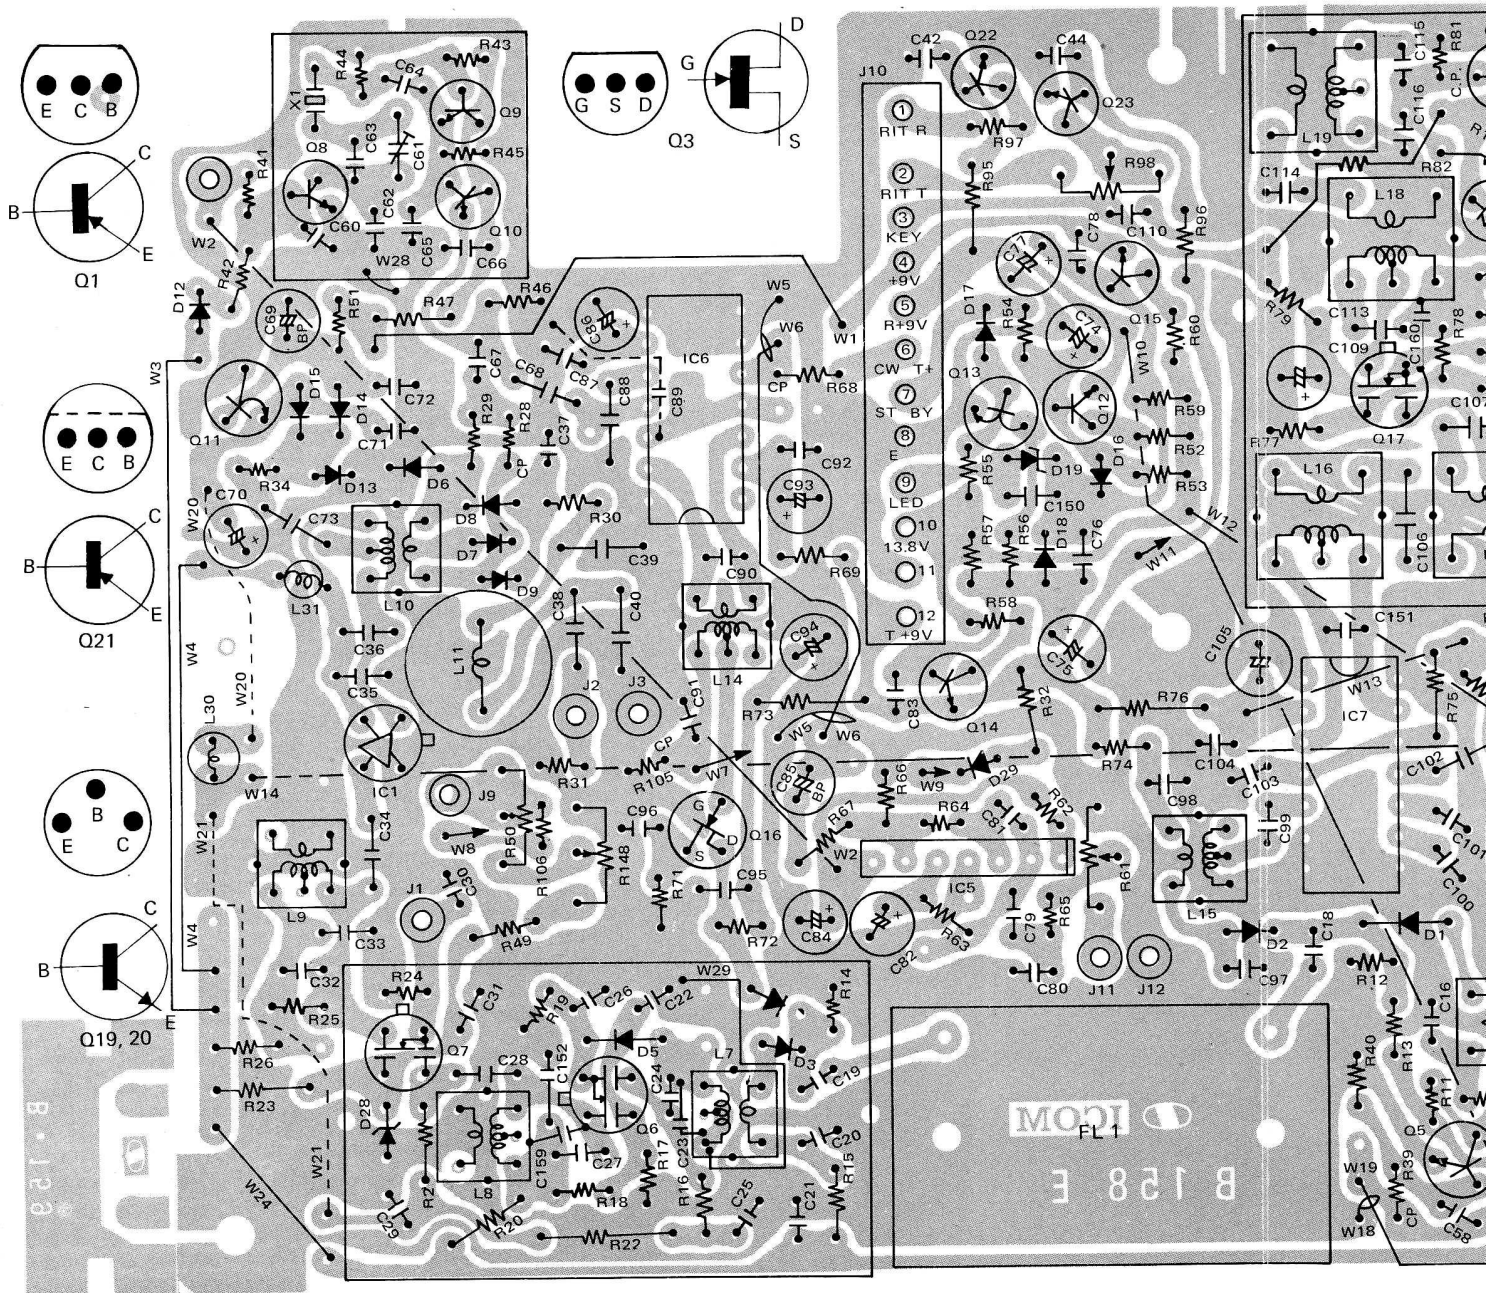

Q12, 14, 15




Q4, 5, 8, 9, 10,
11, 13, 22, 23,

VOLTAGE CHART


Unit	Q No.	Mode	Transistor			F E T				Remarks
			(B)	(C)	(E)	(G1)	(G2)	(D)	(S)	
Main Unit	Q1	R	8.2	8.9	8.9					NB-ON "
	Q1	T	0	0	0					
	Q2	R				0	4.2	9.0	0.23	
	Q3	R				0		9.0	0.86	
	Q4	R	0	2.1	E					
	Q5	R	0	6.7	E					
	Q6	R				0	4.2	8.8	0.35	
	Q7	R				0	5.4	8.8	0.65	
	Q8	R	0.7	0	E					
	Q8	T	0	0	E					
	Q9	R	5.0	7.0	4.4					CW-T
	Q10	R	4.4	7.0	3.8					
	Q11	R	0.05	E	0					
	Q11	T	0.05	E	0					
	Q12	R	9.9	12.2	9.2					
	Q12	T	0	13.0	0					
	Q13	R	0.65	0	E					
	Q13	T	0.23	9.8	E					
	Q14	R	0	13.2	0					
	Q14	T	9.8	11.3	9.2					
	Q15	R	9.3	12.2	8.7					
	Q16	T				0		6.4	0.7	
	Q17	T				0	4.1	8.8	0.45	
	Q18	R	0	13.2	0					
	Q18	T	1.3	12.6	0.6					
	Q19	R	0	13.2	E					
	Q19	T	0.72	13.2	E					
	Q20	R	0	13.2	E					
	Q20	T	0.75	13.2	E					
	Q21	R								
	Q21	T								
	Q22	R	0.67	0	E					
	Q22	T	0	3.7	E					
	Q23	R	0	4.8	E					
	Q23	T	0.67	0	E					
VXO Unit	Q1	R&T	1.8	6.1	1.3					
	Q2	R&T	1.7	7.8	1.3					
	Q3	R&T	1.6	7.7	1.55					
	Q4					6.1	8.7	7.1		

Bottom View




IC 1
IC 3
IC 4

Top View




IC 6
IC 7

Top View



IC 2

Side View



IC 5

Unit	IC No.	Mode	Pin No.														
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	
Main	IC1	R	9.3	9.3	2.05	E											
	IC2	R	1.4	13.0	12.3	7.3	6.1	13.0	0.21	1.7							
	IC2	T	1.5	13.0	12.8	0	0.55	13.0	0	4.8							
	IC3	R	6.6	9.3	2.05	E											
	IC4	R	9.3	9.3	2.05	E											
	IC5	T	1.8	0.5	0.035	E	0.58	7.5	9.2								
	IC6	T	0	8.8	7.8	4.5	2.9	E	E	E	2.9	4.5	4.5	4.5	7.8	E	
	IC6	T	0	8.4	6.0	5.5	4.9	E	E	E	4.7	5.4	5.5	5.5	6.0	E	
	IC7	T	E	8.8	7.1	6.1	3.9	E	E	E	3.9	6.1	6.1	6.1	6.1	E	CW-T

Note: E = Ground

